

# 6225A



MODEL 6225A

## SOFT SERVE FREEZER

Twin twist flavor, Countertop, Pump feed,  
Microprocessor control

### Product Offering

Offer all popular soft serve variations from low or non-fat ice cream to custards, yogurt and sorbet

### Freezing Cylinder

Two, 1.7 Liter (1.8 quarts)

### Mix Hopper

Two, 10 Liters (10.6 quarts)

Separate hopper refrigeration maintains mix temperature below 4.4°C (40°F) during Cool and Standby modes.

### Mix Low Indicator

When mix level is low, the Mix Low light turns "ON" to alert operator to add mix.

### Standby

Maintains product temperature in the mix hoppers and freezing cylinders below 4.4°C (40°F) during long no-use periods.

### Microprocessor Controls

Automatically regulates refrigeration and maintains consistent product quality by controlling product temperature and viscosity.

### Counter

Records number of dispenses per day and total number of dispenses.

### Temperature Display

Displays hopper and cylinder temperature; helps control product safety

### Output

270 Cups/Hour  
(80 gram/cup at 4°C Liquid & 24°C Ambient)

### Safety Protections

- Low temperature and motor overload cutouts protect from cylinder over freezing.
- High pressure switch prevents compressor overheat
- Thermal overload protects from motor overheat



50 Hz.  
Models



Flexible blade beater (optional)  
Higher capacity, higher capacity



#### SPACEMAN ICE SYSTEMS (HK) CO, LIMITED

FACTORY: YUANYI RD, INDUSTRY PARK, SANQISHI TOWN, YUYAO, ZHEJIANG, CHINA 315412



PHONE: +86 574 62953030

FAX: +86 574 62951664

www.spaceman-company.com

Email: info@spaceman-company.com

ISO 9001: 2008  
Registered Firm

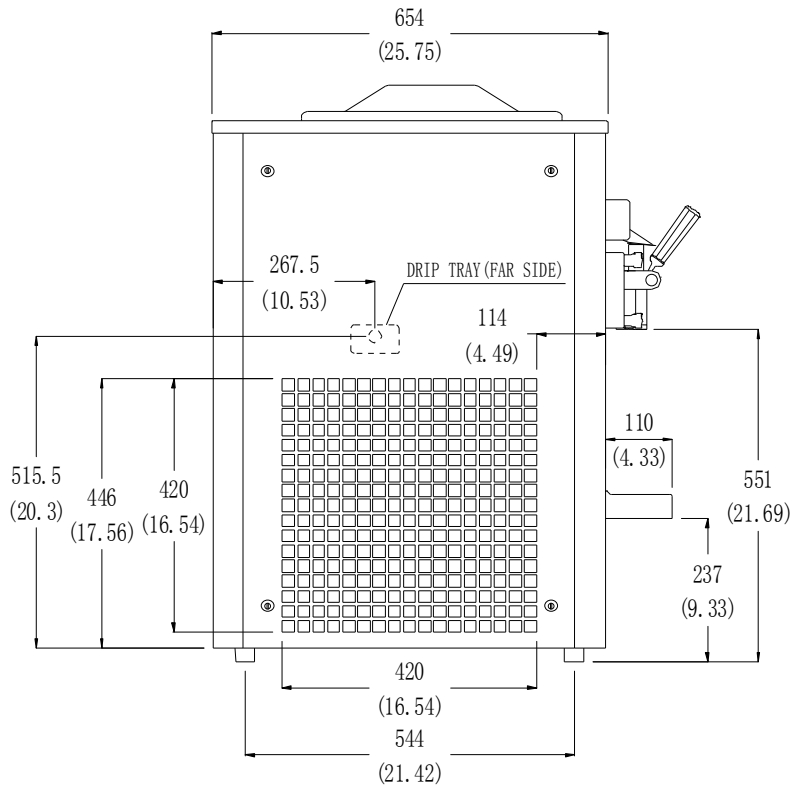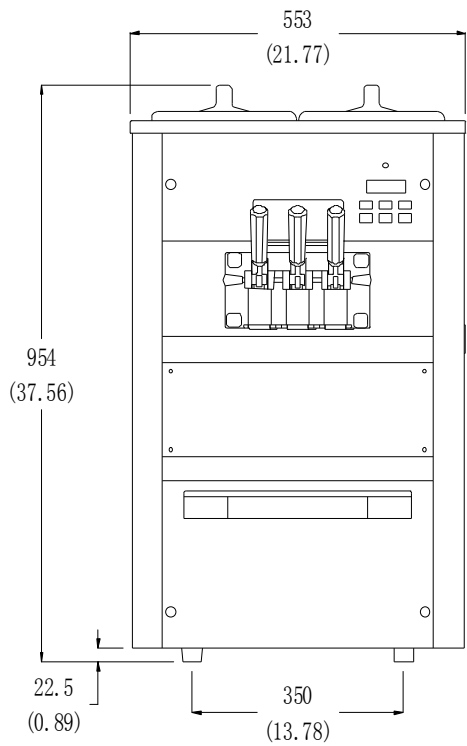

Weight	Kg / lb
Net	166 / 366
Shipping	181 / 399

<b>Packaging Volume</b>	0.57 CBM / 19.97 CBF
-------------------------	----------------------

Dimensions	Net (mm/in)	Shipping (mm/in)
Width	553 / 21.8	620 / 24.4
Depth	653 / 25.7	800 / 31.5
Height	957 / 37.7	1140 / 44.9

Electrical	Maximum Fuse Size	Min. Circuit Ampacity	Poles (P) Wires(W)
220-240/50/1	16	12	3P/3W
208-230/60/1	20	15	3P/3W

*This unit may be manufactured in other electrical characteristics. Refer to the local Distributor for availability. (For exact electrical information, always refer to the data label of the unit.)*

**Note**  
Continuing research results in steady improvements; therefore these specifications are subject to change without notice.

**Specifications**

**Electrical**  
One dedicated electrical connection is required. Unit shall be cord connected or permanently connected. Consult your local Spaceman distributor for available cord & receptacle specifications as per local codes.

**Motor**  
One, 1.5HP

**Refrigeration System**  
Main Compressor: One, 3650 BTU/HR, R404A

Separate Hopper Cooling Compressor:  
One, 480 BTU/HR, R134A  
(BTUs may vary depending on compressor used.)

**Air Cooled**  
Minimum clearance of 152mm (6") on both sides is required to achieve optimum performance. The rear of the unit may be placed against a wall.

- Options**
- Top Air Discharge Chute (air cooled only).
  - Water Cooled.
  - Local language Control systems: English, French, Spanish, German, Dutch, Czech, Chinese.
  - Cone dispenser